

NU-880F


Panphonic Surround Microphone



The NU-880F is really several microphones in one, and probably the highest definition microphone ever built, as close as we get to capturing sonic reality. Ultra wide frequency response and low noise floor with pure and fully discrete class-A circuitry create a sound with a previously unheard “being there” factor.

The NU-880F captures sound in 360 degrees and produces mono, stereo or surround simultaneously. The patented technology allows pickup polar patterns and direction to be freely adjusted, even after the actual recording event (in mixdown). A rugged, lightweight design for demanding location and studio recording.

Microphone noise spectrum
NU-880F

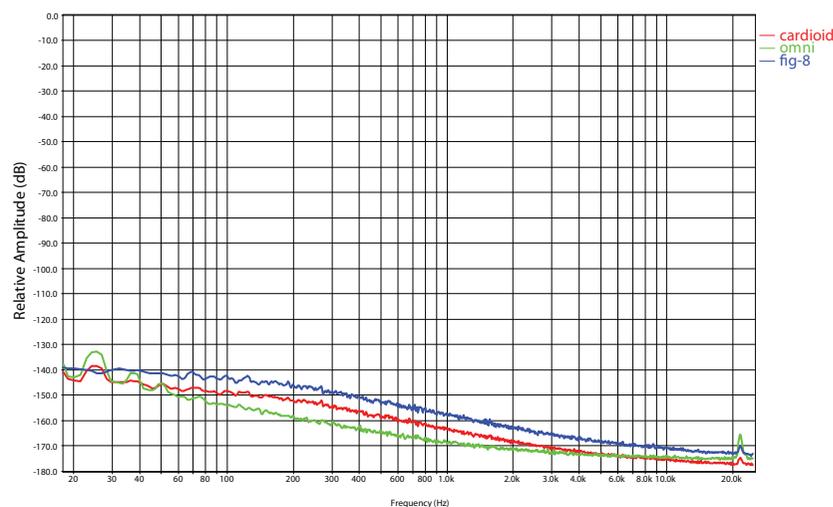

Pickup pattern: Native horizontal B-format, 2x fig-8, 1x omni.

Frequency response: 18Hz - 25kHz

Sensitivity: 19 mV/Pa

Self noise: 11dB(A)

Max SPL: 133dB

Power requirements: Phantom power +48V @ 5.6mA (x3)

Dimensions: 190 x 38 mm

Weight: 295 g

Output format: 3 x XLR 3-pin



MSRP: 4.500€